


## SMS: Signal Measurement System

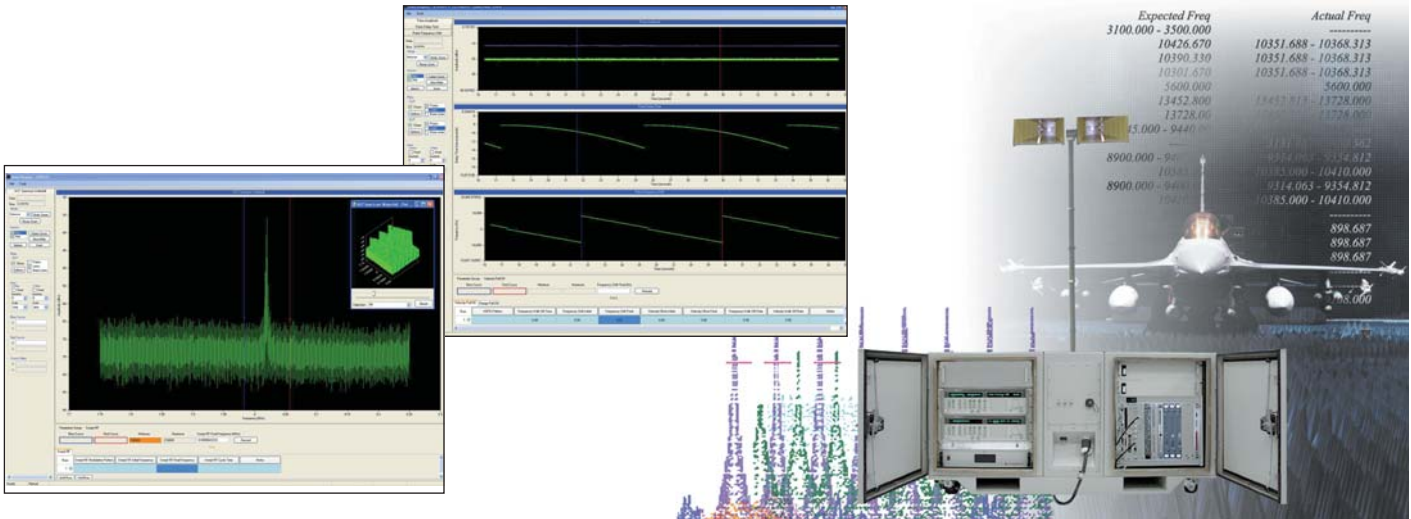

***SMS's real-time, dynamically active/reactive capability has proven itself an essential component of a flexible, efficient, and cost-effective test program.***

As electronic warfare (EW) threats have proliferated, the need for sophisticated defensive systems has increased. The ability to test these advanced systems under realistic conditions throughout their life cycle and to verify their performance is critical to mission success.

The SMS provides the capability to fully monitor test procedures and validate results, assuring the warfighter's optimal chances of surviving the mission. Survivability is also enhanced by an effective training program which is supported by the SMS post-test analysis of the training environment and the system under test's response.

**Northrop Grumman's Signal Measurement System (SMS) provides real-time RF measurement and analysis of threat emitters and corresponding SUT Jammer responses for hardware-in-the-loop, installed system, and open-air range applications.**

- Validates the test environment by verifying threat simulator signals and SUT (radar and/or ECM) response in real time and allows correlation of ECM with threat activity
- Monitors test progress to provide real-time indication of test correlation, failures, or anomalies
- Provides for post-test analysis of the threat signal and correlated SUT Jammer response with automatic parametric measurement to allow ECM technique validation
- Operates in stand-alone mode or can be integrated with EW and CNI stimulators to enable shared use of databases and use of a common time base (GPS and IRIG-B)
- Versatility of application, readily configured for laboratory, anechoic chamber, and open air range operation adds value by meeting test/evaluation needs throughout an EW program's life cycle
- Real-time and post-test analysis tools optimize the use of costly chamber and range time
- Re-programmability allows adaptation for new requirements while performing a test
- User configurable ECM technique analysis definitions
- Modularity permits easy upgrades and/or equipment swap-outs for addition of new features
- Non-invasive system application permits dynamic, high-fidelity measurement, and analysis without affecting test results
- Selective programming enables user to trap specific radars and find specific events or emitters
- Integrated and automated features such as scripted operation reduce the need for operator interaction and oversight
- Measurements of two independent simultaneous frequency agile signals with optional 2nd high speed synthesizer
- Detailed report generation
- Intuitive and robust software applications along with COTS hardware offers the advantages of an NDI solution



## SMS: Signal Measurement System

The SMS provides for comprehensive ECM Technique evaluation and response verification with analysis tools and displays including a standard off-the-shelf suite as well as user customizable analysis definitions.

### ECM Technique Analysis Tools and Displays

Range Gate Pull Off (RGPO)	Coordinated RGPO	RANRAP
Velocity Gate Pull Off (VGPO)	Swept Square Wave	Blinking
Noise <ul style="list-style-type: none"> <li>• Doppler</li> <li>• Range Gated</li> <li>• CW</li> <li>• FL</li> <li>• Spot</li> <li>• Barrage</li> <li>• Swept</li> <li>• Cover Pulse</li> </ul>	Intrapulse <ul style="list-style-type: none"> <li>• Frequency</li> <li>• Amplitude</li> <li>• Phase</li> </ul>	Multiplexed False Targets
Coordinated False Targets	Swept RF	Skirt Modulation
Pseudo CW	DRR	Offsets
Combined	Multiple Doppler	Custom

### Measured Parameters

Parameter	Measurement Range	Measurement Accuracy	Measurement Resolution
Frequency	0.5 to 2 GHz 2 to 18 GHz 32 to 38 GHz	150 Hz, coherent signals 5 kHz quick-look, PW dependent	10 Hz 10 kHz quick-look
Bandwidth	0 to 500 MHz	10% quick-look, 1 kHz minimum 300 Hz, coherent signals	1% of span
Pulse Width	20 ns to 65 ms	40 ns	5 ns
PRI	1 us to 65 ms	4 ns for 256 pulses 25 ns for 3 pulses	5 ns
Amplitude	Dynamic Range	2.5 dB, absolute 1.0 dB, relative	0.05 dB
TOA		50 ns	5 ns

#### For more information, please contact:

Northrop Grumman Corporation  
Amherst Systems  
1740 Wehrle Drive  
Buffalo, New York 14221-7032 USA  
Phone: 1-800-631-0610, ext. 2259  
Fax: (716) 631-0629  
e-mail: amherstsolutions@ngc.com  
www.es.northropgrumman.com

### SMS Features and Characteristics

#### SUT and Threat Simulator Input Frequency Ranges

- 2 GHz to 18 GHz
- Standard options for frequency extensions including 0.5 to 2 GHz and 32 to 38 GHz

#### Instantaneous Bandwidth

- 40 MHz and 80 MHz

#### Dynamic Range with Performance Accuracy

- 50 dB in 40 MHz and 47 dB in 80 MHz

#### DSP IF Filters

- 5 MHz, 10 MHz, and Custom

#### Real-time Recording Rate

- 400 MSPS

#### Recording Time

- Greater than 24 hours at maximum recording

#### High Speed Data Storage

- 8 Terabytes per Channel, Expandable

#### Closely Coupled with CEESIM and AMES RF Simulators

- IRIG-B with GPS Synchronized
- Scripted Scenario Control for Correlation of SUT Response to Threat Emitter
- High Speed LO Control for Threat Emitter Tracking

#### Tuning Speed

- < 1us over entire frequency range providing pulse-by-pulse frequency agility when tracking a CEESIM or an AMES emitter

#### External Control

- Ethernet 10/100/1000 Base Tx
- Event Triggers, Custom RS-422

#### Real-Time Results and Confirmation

- Quick Look Displays
  - Pulse-to-Pulse Delay (PRI)
  - Pulse Amplitude
  - Spectrum Plot
  - PDW Zero Span
  - Spectrum Waterfall
- Pulse Frequency
- Pulse Width

#### All Data Archived for Post Test Analysis

- Data storage computer with scalable storage capacity

#### Time Standard Subsystem

- Provides for overall laboratory time standard with IRIG-B/GPS synchronization
- Rubidium Reference Clock

#### Report Generator

- Detailed reports including pass fail indications based on user specified criteria
- User customizable
- .pdf file format